

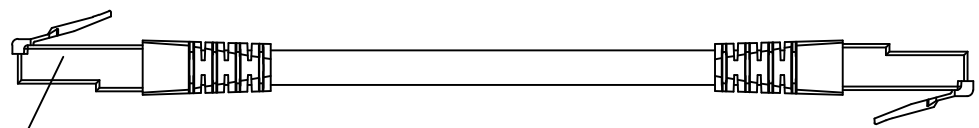
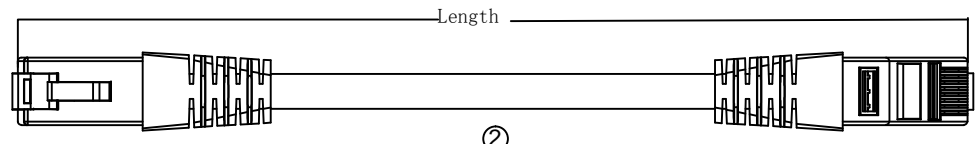


Revisions			
REV.	ECN NO.	Description	DATE
A			

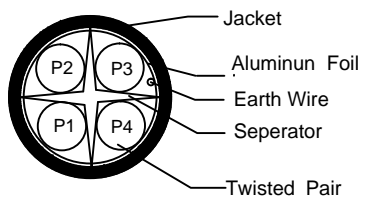

PLUG ①




P1 Blue&white/blue
P2 Orange&white/orange
P3 Green&white/green
P4 Brown&white/brown

Pin Assignment:

Pos. No.	T568B WIRING	Pos. No.
1	Orange	1
2	White/Orange	2
3	Green	3
6	White/Green	6
4	White/Blue	4
5	Blue	5
7	Brown	7
8	White/Brown	8


- Product Description:
- ⚠ All cable 100% testing, any open, miswiring, short & intermittent are not permitted.
 - ⚠ After crimping the distance between the bottom of contact and the top surface of plug are 5.90~6.146mm.
 - ⚠ The patch cable must be tested with Channel test of Fluke DTX-1800.
 - ⚠ RoHS compliant PVC or PE or LSZH Jacket
 - ⚠ Installation temperature -30℃~+50℃; Minimum bending Radius:8D

④			
③	OVERMODE		48P PVC
②	CABLE	1 PCS	CAT 6 FTP 26AWG(7/0.16)*4P Stranded Cable Jacket, OD:6.0±0.2mm.
①	RJ45 PLUG	2 PCS	RJ-45 8P8C Contact: Phosphor Bronze Fu ".UL94V-0
NO	ITEM	QTY	DESCRIPTION



Shenzhen Copperled Technology Co.,Ltd

TITLE:FTP Cat.6 Patch cord Plain molded Yellow color

P/N:	CL-PCF01-C6	DESCRIPTION	CAT.6 FTP 26AWG PATCH CORD	DWG NO	
MATERIAL	Cu+PVC	UNIT	mm	SCALE	1:1
DIMENSIONAL TOLERANCE		THIRD ANGLE PROJECTION		DRAWN	DATE
1000±15MM					2017.11.30
2000±15MM				CHECK	DATE
3000±20MM					2017.11.30
5000±20MM		APPROVAL		DATE	2017.11.30