




Cat.6 24 Port Patch Panel with Back Bar

UTP Cat.6 Patch Panel, 24 Port Dual Use IDC with Back Bar

CL-U24P-C601

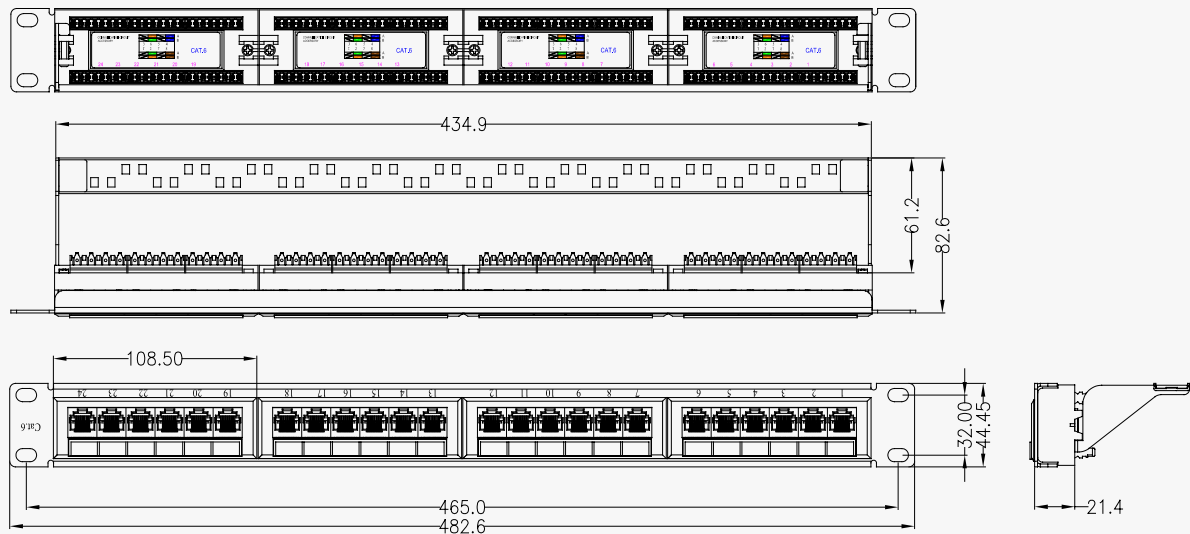

NOTES:

ELECTRICAL :

- 1.VOLTAGE RATING : 125 VAC RMS
- 2.CURRENT RATING : 1.5 AMP
- 3.CONTACT RESISTANCE :100 MILLIOHMS MAX
- 4.INSULATION RESISTANCE :1000 MEGOHMS MIN @ 500 VDC
- 5.DIELECTRIC STRENGTH :750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

- 1.STORAGE : -40° TO +85°
 - 2.OPERATION : 0° TO 70°
- CONFORM TO ANSI/TIA/EIA-568 B.2-1
 MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68

MECHANICAL:

1. HOUSING MATERIAL :PBT+15%GF UL94V-0
2. PANEL FRAME :CARBON STEEL, POWDER COATING IN BLACK COLOR
3. CONTACT MATERIAL :PC UL94V-0 CONTACT:PHOSPHOR BRONZE WITH NICKEL PLATING
4. RJ45 JACK LIFE :750 TIMES MIN
5. IDC LIFE :200 TIMES MIN
6. WIRE :AWG 24~26
7. TESTING CONDITION OF TRANSMITTING CAPABILITY: 250MHz