
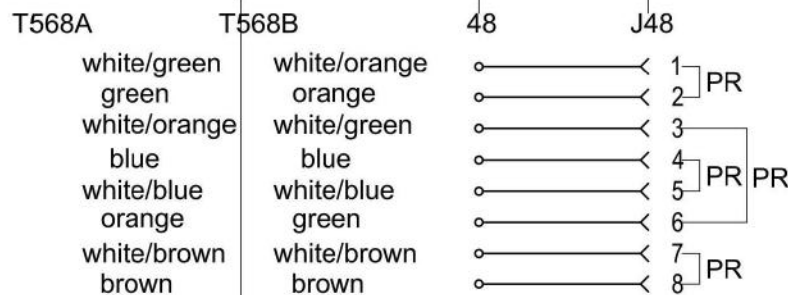



Electrical schematic or Electrical schematic
T568A or T568B

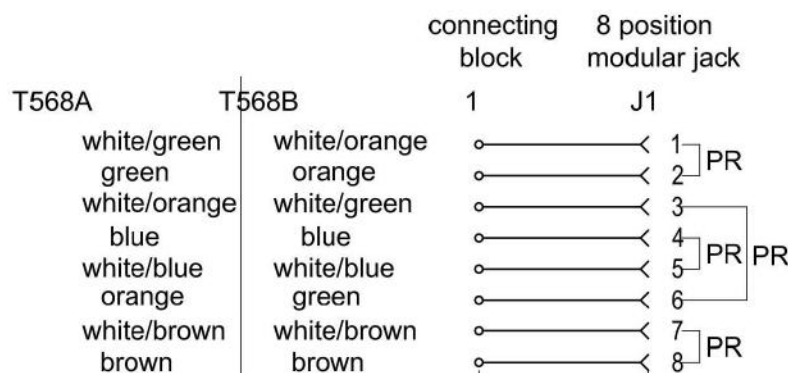

Key Specifications/Special Features

- 1.Operation temperature:-20℃ to 60℃, Relative humidity: 85%(30℃), Air pressure: 70-106Kpa.
- 2.With Cat5e keystone modules used for 19" cabinet, Complete metalation and reed construction, modularization design ;
- 3.IDC: phosphor bronze and silver plating (20-50uinch), suitable diameter 0.4-0.6mm, durability 200 cycles ;
- 4.Contact pin: phosphor bronze and gold plating (20-50uinch), mating durability not less than 750 cycles ;
- 5.Anti-burn performance: plastic part made from PPO and PC or PBT and ABS, meeting the international standard ;
- 6.Intermediate resistance: no more than 20m ohm in normal atmosphere pressure (not including bulk resistor) ;
- 7.Insulated resistance: no less than 1,000M ohm in normal atmosphere pressure ;
- 8.The intensity of anti-currency: DC 1,000V (AC,700V), No puncture and flash-over phenomenon in one minute. Accord with industry standard ;
- 9.Label:clear label to ensure easy to manage ;
- 10.Type:unshielded
- 11.Standard: designed by international ISO/IEC11801 and TIA/EIA568B.2 ;

TITLE:			 Shenzhen Copperled Technology Co.,Ltd CopperLed	
	INCH	MM		
.X	.015	.30		
.XX	.010	.10	TITLE: 24 port patch panel	
.XXX	.005	.05	P/N: CL-U24P-C602	
DRAWN BY	MA		SCALE	1:1
CHECK BY			UNIT	MM
APPD BY			SHEET	1/1
			DATE	2017/04/05
			DWG NO:	